

Dockside Collection (NATURAL T. 8.0)


Product description

P G57

Stand: 12.17




System

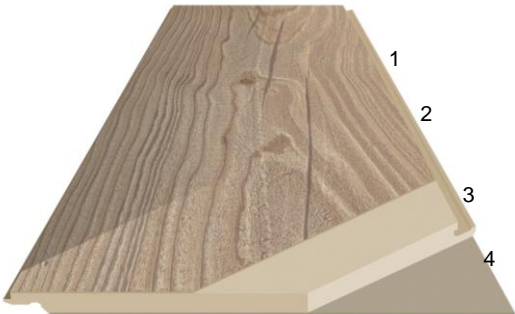





- 1 high-grade durable overlay
- 2 impregnated decorative paper
- 3 HDF Optima
- 4 balancer

Profile










Kaindl Loc
profile longitudinal

Fold Down
profile transversal

| Tests | Flooring ¹ Symbols | Results |
|--|---|------------------------------|
| Panel dimension | | 1383x193x8mm |
| Service category per Standard per | EN 685 EN 13329  | 32 |
| Abrasion resistance | EN 13329  | AC4 |
| Impact resistance small ball big ball | EN 13329  | ≥12N ≥750mm |
| Formaldehyde emission of the substrate before coating | EN 120 DIBT- Richtlinie 100  | E1 |
| Formaldehyde emission | EN 717-1 | < 0,1 ppm |
| | EN 717-2 | < 3,5 mg/h m ² |

All values are approximate values - fluctuations cannot be absolutely ruled out.

| | | |
|--|--------------------------------|---|
| Floorconstruction | | GREENGUARD GOLD |
| Formaldehyde emission | CARB | CARB Phase 2 |
| Thickness swelling / edge swelling | EN 13329 |  < 18 % |
| Thermal conductivity | ISO 8302 |  0,0780 m ² .K/W |
| Moisture residue HDF | EN 322 | 4 - 7 % |
| Resistance to cigarette burns | EN 438-2.18 |  grade 4 |
| Light fastness | EN ISO 105-B02 EN 20105-A02 |  not worse than 6 Blue wool scale not worse than 4 Grey scale |
| Lifting resistance | EN 13329 | ≥ 1 N/mm ² |
| Cross tensile strength | EN 319 | > 1 N/mm ² |
| Resistance to stains | EN 438-2.15 |  groups 1-2 grade 5 group 3 grade 4 |
| Combustibility | EN13501-1 |  Cfl , s1 |
| Sliding friction μ | EN 13893 |  ≥ 0,3 |
| Dimensional variants after changes in relative humidity | EN 13329 | length and width ≤ 0,9 mm |
| Straightness of the panels | EN 13329 | ≤ 0,30 mm / m |
| Height difference between elements | EN 13329 | maximum ≤ 0,15 mm average ≤ 0,10 mm |
| Squared elements | EN 13329 | ≤ 0,2 mm / panel width |
| Flatness of the element width | EN 13329 | concave ≤ 0,3 mm convex ≤ 0,4 mm |
| Flatness of the element length | EN 13329 | concave ≤ 7 mm convex ≤ 14 mm |
| System pattern matching widthwise | | +/- 2mm |
| Ship's planking matching widthwise | | +/- 4mm |

1)Information under www.floorsymbols.com